

The Wizard is a lightweight, compact auto-braking descender for rope access and rescue.

It features a button that allows the cam to be held open for easier insertion of the rope and to remain connected to the user while it is open or while the rope is being inserted or removed.

It is equipped with an anti-panic function in the lever that re-engages the cam and locks the rope if the handle is pulled too far where it could lead to unsafe descent speeds. The lever automatically returns to the LOCK position when released.

The Wizard delivers extraordinary controllability with its proven internal mechanism and the rigid lever that is made of robust hot-forged aluminum alloy.

The locking cam uses an innovative design for smooth action on the rope which prevents rapid wear-and-tear and absorbs energy from small shocks with a slight amount of rope slippage. The cam can be deactivated with a trigger to allow quick sliding of the rope in situations with no load or limited load.

Equipped with NFC TRACK tag for digital identification.

Standards:


- **EN 12841/C** as a descender for semi-static ropes from 10.5 to 11 mm and for workers up to 150 kg; can also be used for rope access rescue up to 200 kg.

- **EN 341/2A** as an emergency evacuation device on a single line for workers up to 120 kg, 11 mm semi-static rope (Iridium 11 mm).

- **EN 15151-1** for climbing structures using mountaineering techniques with dynamic ropes ranging from 8.9 to 11 mm.



WIZARD BLACK
349903

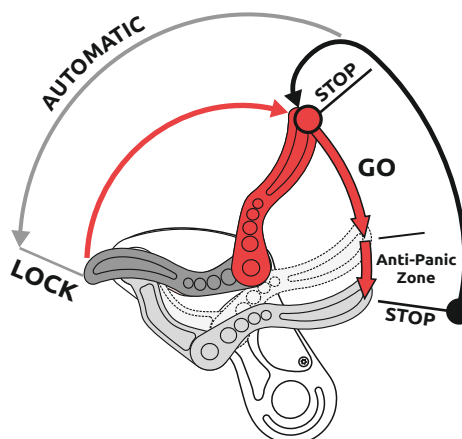

Ref.	Product name Nombre del producto	Weight Peso		Breaking load Carga de rotura	Rope diameter Diámetro de cuerda		CE		STANDARD	Rescue use Uso en rescate	EAC
		g	oz		Mín - mm	Max - mm	EN 12841/C	EN 15151-1			
3499	WIZARD	315	11.1	12	8.9	11	•	•	•	Max 200 kg	•
349903	WIZARD BLACK										

Robust **hot-forged** aluminum alloy


Button: allows to insert or remove the rope without removing the connector

Trigger to allow quick sliding of the rope in situations with no load or limited load


Equipped with **NFC TRACK** tag for digital identification

Equipped with an **anti-panic function**

The lever **automatically returns** to the LOCK position when released

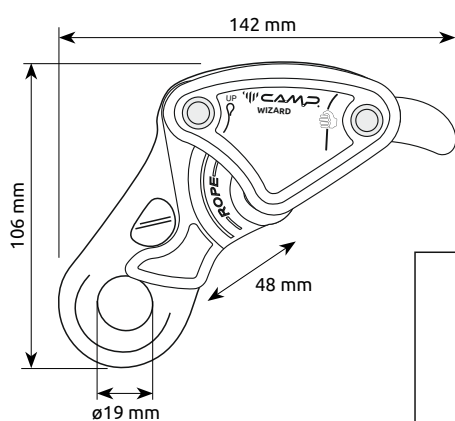

Installation / Istallazione / Installation

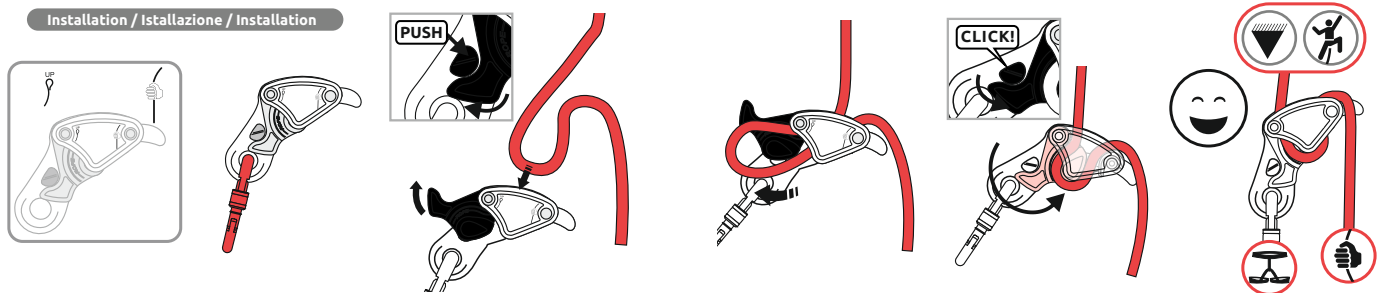

Rope compatibility Compatibilità della corda Compatibilité de la corde



EN 12841/C

- EN 1891 Type A
10,5 ≤ Ø ≤ 11,0 mm



EN 341/2A


- EN 1891 Type A
C.A.M.P. Iridium Ø 11 mm
ref.2811/2811A




EN 15151-1

- ① EN 892 Single
8,9 ≤ Ø ≤ 11 mm

Discesa EN 12841C / EN 12841C Descending / Descente EN 12841/C

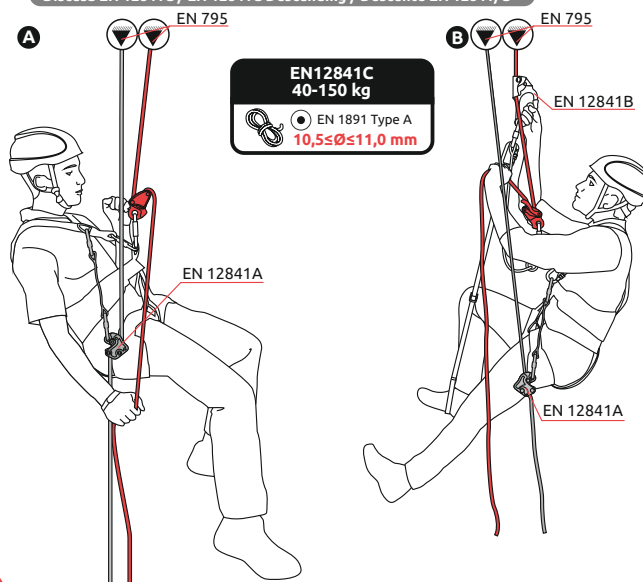

Spostamento orizzontale Horizontal movement Déplacement horizontal

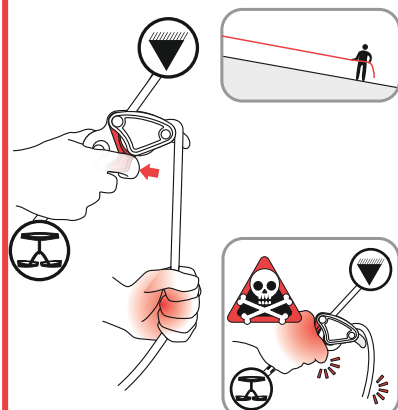

Giving slack quickly Dare corda rapidamente Donner du mou rapidement

