



Positioning lanyards constructed from 12.5 mm polyamide semi-static rope.

Ergonomic squeezeactivated aluminum alloy adjustment device.

Available in a large variety of lengths and configurations to meet the varied needs of workers at height.

Equipped with NFC TRACK tag for digital identification.

Ergonomic adjustment device

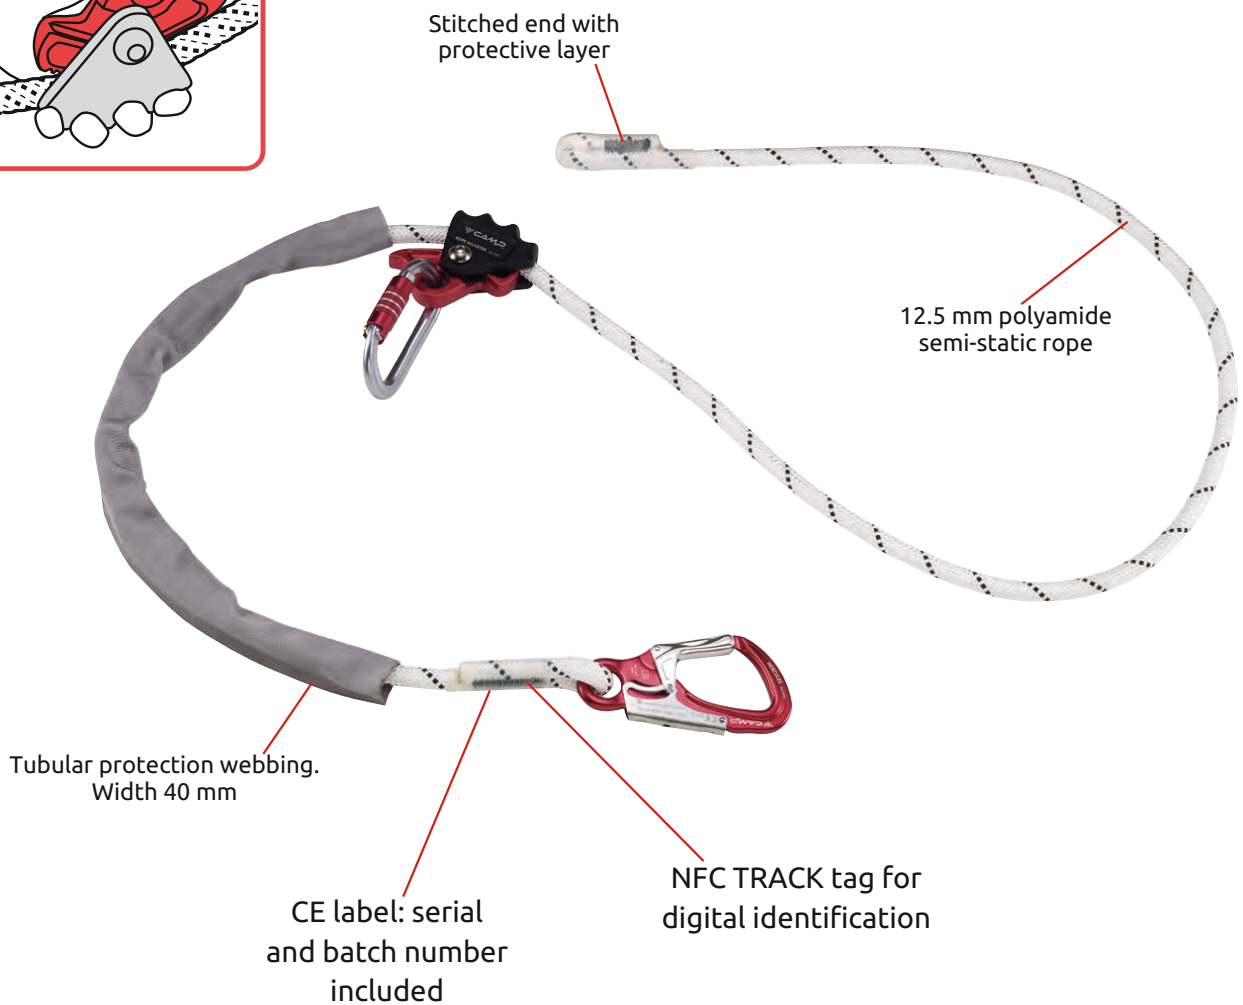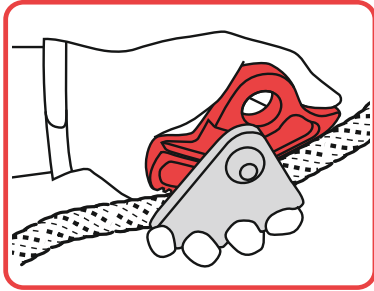

Ref.	Product name Nombre del producto	Weight Peso		CE EN 358	ERC
		g	oz		
203111	ROPE ADJUSTER 0.5-2 m	525	18.5	•	•
203112	ROPE ADJUSTER 0.5-5 m	1010	35.7	•	•
203113	ROPE ADJUSTER 0.5-10 m	1360	48.0	•	•
203114	ROPE ADJUSTER 0.5-20 m	2420	85.4	•	•
203115	ROPE ADJUSTER + 0981E + 0986 0.5-2 m	915	32.3	•	•
203116	ROPE ADJUSTER + 0981E + 0986 0.5-3 m	1230	43.4	•	•
203128	ROPE ADJUSTER + 0981E + 2017 0.5-2 m	1135	40.1	•	•
203119	ROPE ADJUSTER + 2125 + 0995 0.5-2 m	720	25.4	•	•
203121	ROPE ADJUSTER + 2125 + 0984 0.5-2 m	1040	36.7	•	•

NO CONNECTORS

ROOFS

- 203111** 0.5-2 m
- 203112** 0.5-5 m
- 203113** 0.5-10 m
- 203114** 0.5-20 m



STEEL CONNECTORS

TOWERS/INDUSTRY, CONSTRUCTION

- 203115 + 0981E + 0986** 0.5-2 m
- 203116 + 0981E + 0986** 0.5-3 m



Ref.0981E
Screw gate
locking system

HOOK 17 mm opening
Ref.0986
Breaking load 25 kN

- 203128 + 0981E + 2017** 0.5-3 m



Ref.0981E
Screw gate
locking system

HOOK 54 mm opening
Ref.2017
Breaking load 25 kN.

ALUMINUM CONNECTORS

ROPE ACCESS, TOWERS/INDUSTRY


203119 + 2125 + 0995 0.5-2 m



OVAL XL 3LOCK Ref.2125
Breaking strength 28 kN
Opening 20 mm. Automatic lock
requires three actions to open.

HERCULES Ref.0995
Double safety lever system
Breaking load 30 kN
Opening 23 mm

203121 + 2125 + 0984 0.5-2 m

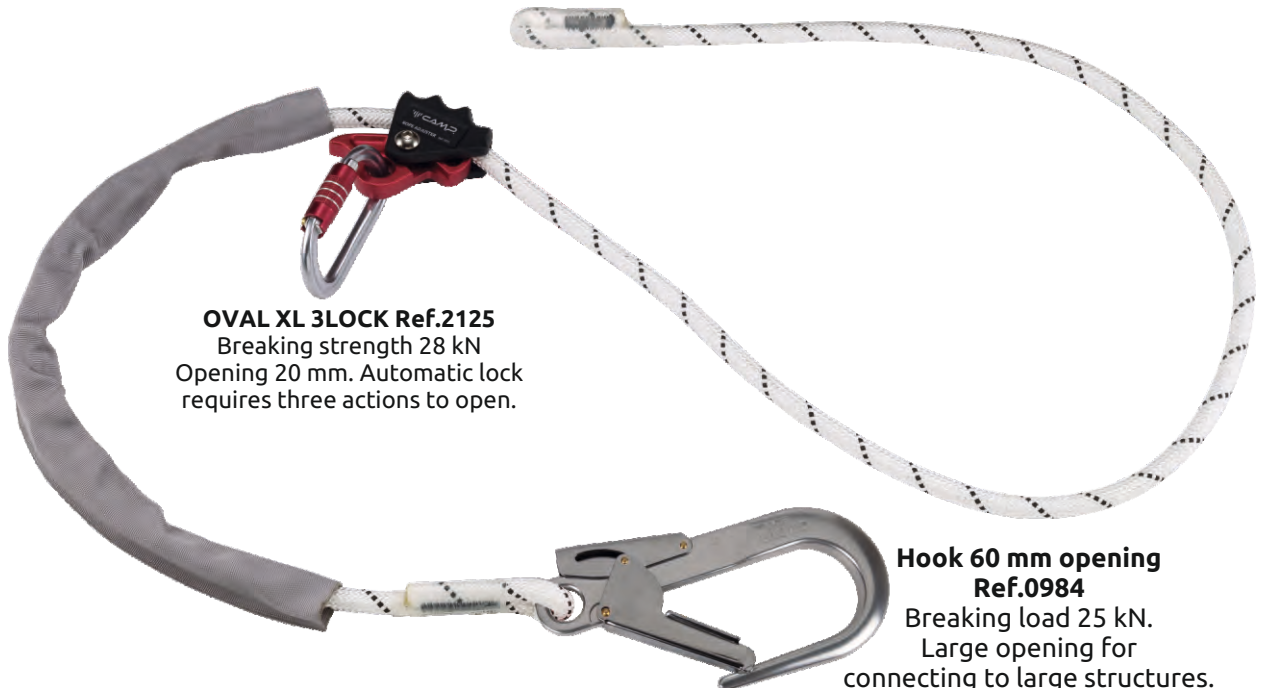

OVAL XL 3LOCK Ref.2125
Breaking strength 28 kN
Opening 20 mm. Automatic lock
requires three actions to open.

**Hook 60 mm opening
Ref.0984**
Breaking load 25 kN.
Large opening for
connecting to large structures.

C.A.M.P. presents a **complete solution for the digital management of PPE**, both for allocation to users and for periodic inspections: the **NFC TRACK hardware tags on the products** work seamlessly with the **G.T.S. - Gear Tracking System software** to make the system very intuitive and easy to use.

NFC TRACK chips are installed on many C.A.M.P. products (harnesses, helmets, Retexo lanyards). They **can also be attached directly on any PPE** by the user, so that the user can assign the PPE data to the chip by means of the C.A.M.P. G.T.S.



NFC (Near Field Communication) technology is now present on most smartphones and used every day for smart payments. Today, it also represents the future for the individual identification of products.

The **HF RFID** (High Frequency Radio Frequency Identification) communication system on which NFC is based allows the C.A.M.P. NFC TRACK to be easily read using any latest generation smartphone or for professionals using a PC reader.

- G.T.S. - GEAR TRACKING SYSTEM

G.T.S. allows professionals to easily manage PPE both via the smartphone app (available on Play Store and Apple Store) and from a PC via the web app (campgts.it).

Two different packages allow for carrying out periodic inspections and also for managing the company allocation of PPE to its employees.

The database of **G.T.S.** includes the **technical information of all C.A.M.P. products** for work at height.

NFC TRACK chip installed!



campgts.it

