


The Prium uses a polyester sheath for low elongation and increased resistance to the effects of humidity, dirt and dust.

The super strong polyamide core combines with the 32 carrier sheath for good handling and twisted yarns for a very high level of abrasion resistance.

The suppleness of the Prium 10.5 mm makes it a great choice for use with ascenders and descenders.



White/Red - **501**: 50 m, **601**: 60 m, **1001**: 100 m, **2001**: 200 m, **6001**: 600 m

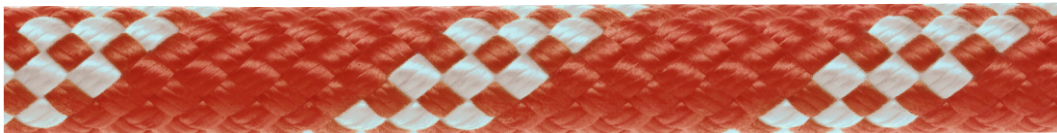

Red/White - **502**: 50 m, **602**: 60 m, **1002**: 100 m, **2002**: 200 m, **6002**: 600 m

Sheath is made with **twisted yarn**, which improve abrasion, resistance and durability of the rope



For 200 and 600 m lengths
replacement labels included!

Can be used to replace old labels
or for individual identification

Ref.	Product name Nombre del producto	Length Longitudes	Weight		Static strength Resistencia estática	Static strength w/ figure 8 knot Resistencia estática con nudo de 8	No. of factor 1 falls (100kg) Número de caídas Factor 1 (100 kg)	Fall factor 0.3 impact force Fuerza de choque (Factor de caída 0,3)	Static elongation Elongación estática	Sheath slippage Deslizamiento de funda	Sheath Porcentaje de funda	Shrinkage in water Encogimiento en mojado	Material	CE EN 1891
			g/m	oz/m										
2815	PRIUM 10.5 mm	50 m	72	2.6	28.5	18.1	19	5.60	2.0	0.8	38	0.9	PA - Polyester PA - Poliéster	A
		60 m												
		100 m												
		200 m												
		600 m												